RNAV (GPS) RWY 17

ALBERT LEA MUNI (AEL)

WAAS	APP CRS	Rwy Idg	5000
CH 49204	167°	TDZE	1260
W17A		Apt Elev	1261


RNP APCH.

Baro-VNAV NA when using Austin altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -28°C or above 36°C. Rwy 17 helicopter visibility reduction below ¾ SM NA. VDP NA with Austin altimeter setting. When local altimeter setting not received, use Austin altimeter setting and increase all DA 48 feet and all MDA 60 feet; increase LPV and LNAV/VNAV visibility ¼ mile all Cats, and LNAV Cat C/D visibility ⅛ mile.


ODALS

MISSED APPROACH: Climb to 2900 direct YEDUT and hold.


AWOS-3PT	ROCHESTER APP CON ★	UNICOM
119.575	119.8 251.125	123.0 (CTAF) L

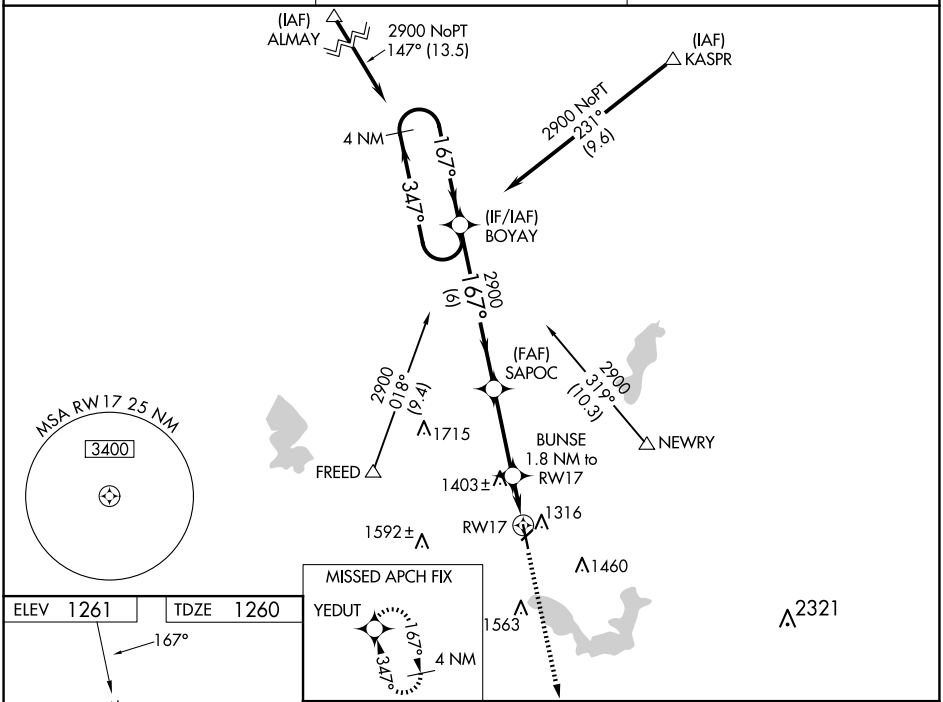

ELEV 1261 TDZE 1260

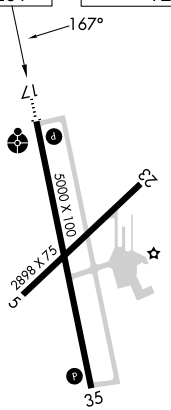

MIRL Rwy 17-35 L
REIL Rwys 17 and 35 L

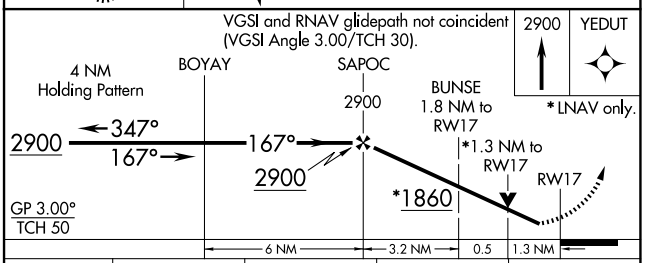

CATEGORY	A	B	C	D
LPV DA	1510-¾ 250 (300-¾)			
LNAV/VNAV DA	1510-¾ 250 (300-¾)			
LNAV MDA	1700-1 440 (500-1)		1700-1¼ 440 (500-1¼)	

NC-1, 29 OCT 2026 to 26 NOV 2026
NC-1, 29 OCT 2026 to 26 NOV 2026