BOTCH TWO DEPARTURE (RNAV)

(BOTCH2.BOTCH) 14MAY26

FORT WORTH, TEXAS


PEROT FLD/FORT WORTH ALLIANCE (AFW)

TOP ALTITUDE: ASSIGNED BY ATC

RNAV 1 - DME/DME/IRU or GPS required.

RADAR required.

LONE STAR DEP CON
118.1 306.95
ATIS
126.925
CLNC DEL
128.725
GND CON
132.65 306.2
ALLIANCE TOWER
135.15 257.9

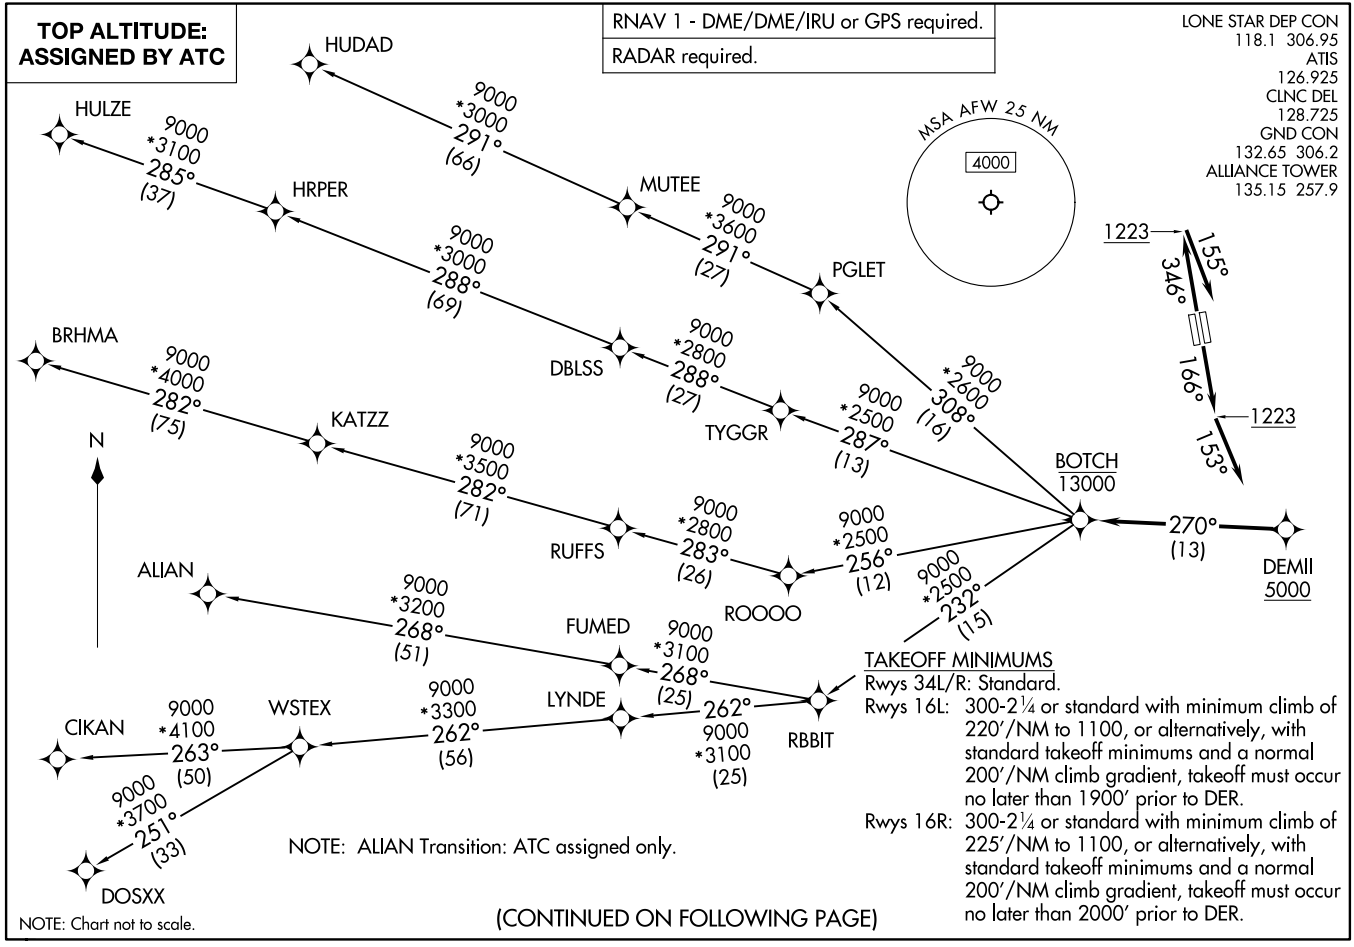

NOTE: ALIAN Transition: ATC assigned only.

TAKEOFF MINIMUMS

Rwys 34L/R: Standard.

Rwys 16L: 300-2¼ or standard with minimum climb of 220′/NM to 1100, or alternatively, with standard takeoff minimums and a normal 200′/NM climb gradient, takeoff must occur no later than 1900′ prior to DER.

Rwys 16R: 300-2¼ or standard with minimum climb of 225′/NM to 1100, or alternatively, with standard takeoff minimums and a normal 200′/NM climb gradient, takeoff must occur no later than 2000′ prior to DER.

NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)

(BOTCH2.BOTCH) 26134

BOTCH TWO DEPARTURE (RNAV)

AL-6918 (FAA)

PEROT FLD/FORT WORTH ALLIANCE (AFW)

FORT WORTH, TEXAS