WAAS	APP CRS	Rwy Ldg	5500
CH 42806	177°	TDZE	1241
W18A		Apt Elev	1245


RNAV (GPS) RWY 18
COUNCIL BLUFFS MUNI (CBF)


RNP APCH.

Baro-VNAV NA when using Eppley Airfield altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Eppley Airfield altimeter setting and increase LPV DA to 1544 feet, LNAV/VNAV DA to 1750 feet and all MDA 60 feet and increase LPV all Cats visibility ⅛ SM, LNAV Cat C and D and Circling Cat C and D visibility ¼ SM.


MISSED APPROACH: Climb to 3000 direct WAMET and hold.

AWOS-3	OMAHA APP CON	UNICOM
126.575	124.5 263.0	122.725 (CTAF) L

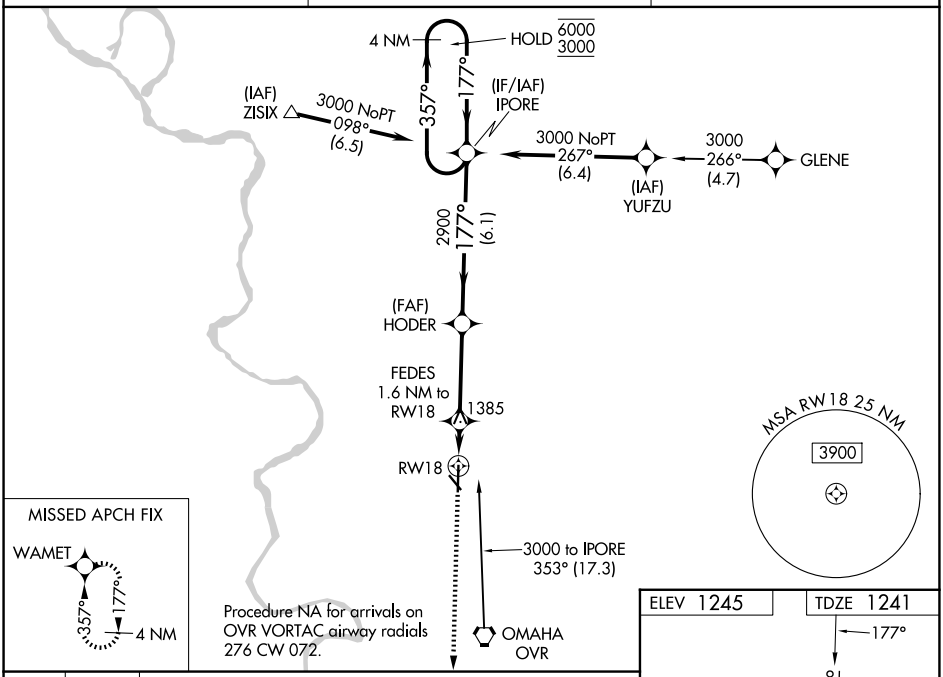

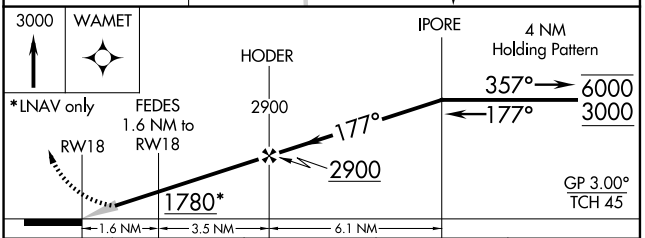

CATEGORY	A	B	C	D
LPV DA	1491-¾ 250 (300-¾)			
LNAV/VNAV DA	1697-1⅜ 456 (500-1⅜)			
LNAV MDA	1640-1 399 (400-1)		1640-1⅛ 399 (400-1⅛)	
CIRCLING	1780-1 535 (600-1)	1840-1 595 (600-1)	1840-1½ 595 (600-1½)	1880-2 635 (700-2)

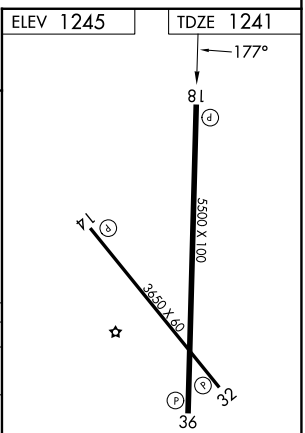

MIRL Rwy 14-32 L
HIRL Rwy 18-36 L
REIL Rwys 14, 32, 18, and 36 L

NC-3, 29 OCT 2026 to 26 NOV 2026
NC-3, 29 OCT 2026 to 26 NOV 2026