RNAV (GPS) RWY 2

CAPE GIRARDEAU RGNL (CGI)


WAAS CH 93832 W02A	APP CRS 023°	Rwy Ldg 3997 TDZE 342 Apt Elev 342


RNP APCH - GPS.


T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Cairo altimeter setting and increase LPV DA to 849 feet, LNAV/VNAV DA to 905 feet, and all visibilities ¼ SM. Increase all MDAs 60 feet and LNAV visibility Cat C/D ⅛ SM, and Circling visibility Cat C/D ¼ SM. Rwy 2 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using Cairo Rgnl altimeter setting.

MISSED APPROACH: Climb to 3500 direct UWALE and hold, continue climb-in-hold to 3500.

ASOS	MEMPHIS CENTER	CAPE GIRARDEAU TOWER★	GND CON	UNICOM
120.55	133.65 292.15	125.525 (CTAF) L	124.7	122.95

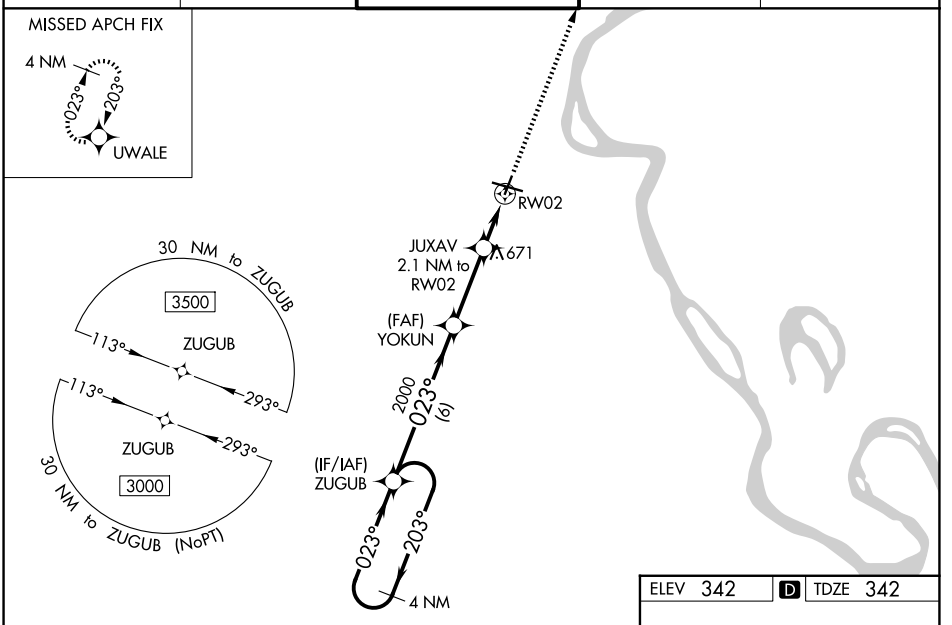

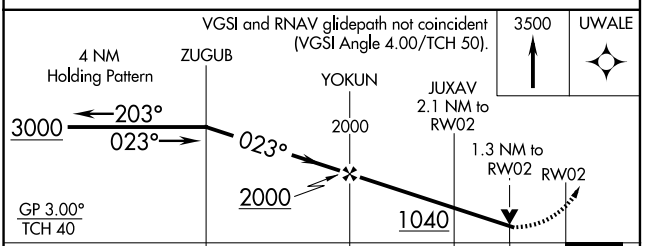

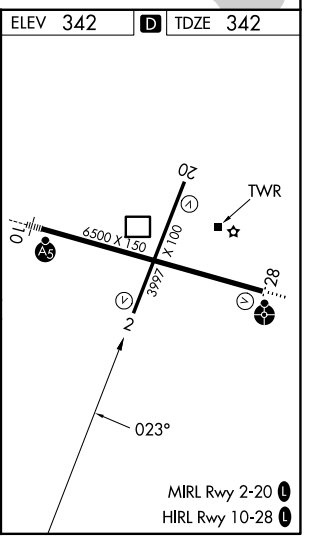

CATEGORY	A	B	C	D
LPV DA	801-1⅜ 459 (500-1⅜)			
LNAV/VNAV DA	857-1⅜ 515 (600-1⅜)			
LNAV MDA	940-1 598 (600-1)		940-1¾ 598 (600-1¾)	
CIRCLING	940-1 598 (600-1)	960-1 618 (700-1)	1000-1¾ 658 (700-1¾)	1080-2¼ 738 (800-2¼)

NC-3, 29 OCT 2026 to 26 NOV 2026
NC-3, 29 OCT 2026 to 26 NOV 2026