WAAS	APP CRS	Rwy Ldg	6500
CH 61399	108°	TDZE	337
W10A		Apt Elev	342

RNAV (GPS) RWY 10

CAPE GIRARDEAU RGNL (CGI)


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Cairo altimeter setting and increase LPV DA to 585 feet, LNAV/VNAV DA to 761 feet, and all visibilities ⅛ SM. Increase all MDAs 60 feet and LNAV Cat C/D visibility ⅛ SM, and Circling Cats C/D visibility to ¼ SM. Baro-VNAV and VDP NA when using Cairo Rgnl altimeter setting. For inop ALS, increase LNAV/VNAV visibility all Cats and LNAV visibility Cat C/D to 1 SM. For inop ALS, when using Cairo altimeter setting, increase LNAV/VNAV all Cats and LNAV Cat C/D visibility to 1 SM.


MALSR


MISSED APPROACH: Climb to 3000 direct FISAV and hold.

ASOS	MEMPHIS CENTER	CAPE GIRARDEAU TOWER ★	GND CON	UNICOM
120.55	133.65 292.15	125.525 (CTAF) L	124.7	122.95

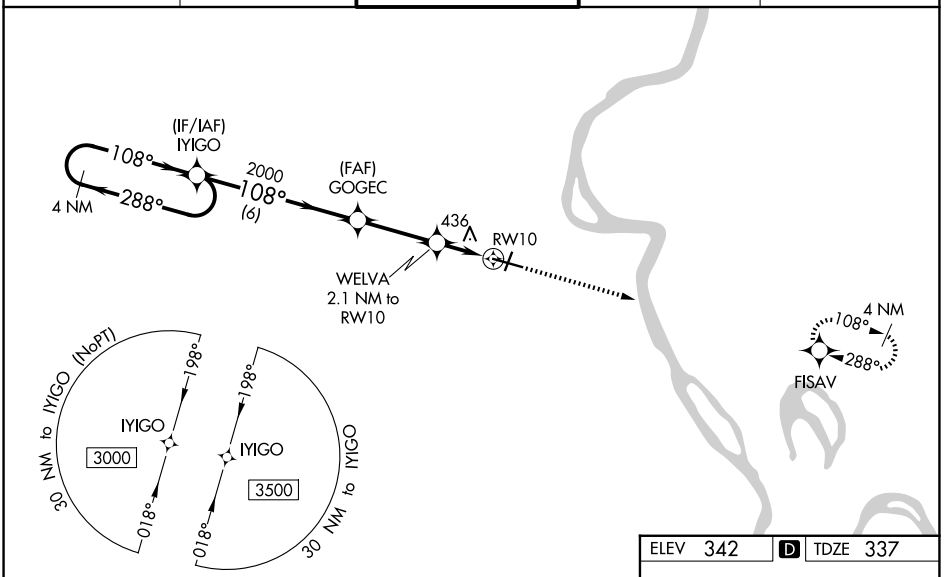

ELEV 342 D TDZE 337

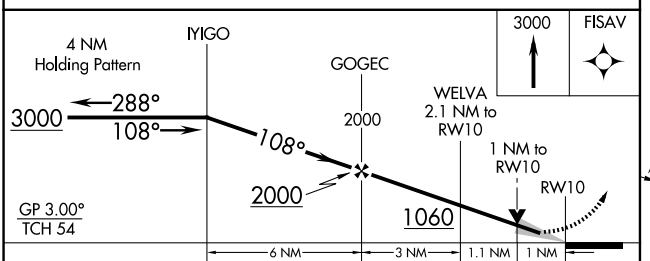



CATEGORY	A	B	C	D
LPV DA	537-½ 200 (200-½)			
LNAV/VNAV DA	713-⅝ 376 (400-⅝)			
LNAV MDA	700-½ 363 (400-½)		700-⅝ 363 (400-⅝)	
CIRCLING	880-1 538 (600-1)	960-1 618 (700-1)	1000-1¾ 658 (700-1¾)	1080-2¼ 738 (800-2¼)

MIRL Rwy 2-20 L
HIRL Rwy 10-28 L

NC-3, 29 OCT 2026 to 26 NOV 2026
NC-3, 29 OCT 2026 to 26 NOV 2026