RNAV (GPS) RWY 28

CAPE GIRARDEAU RGNL (CGI)

WAAS CH 90199 W28A	APP CRS 288°	Rwy Ldg 6500 TDZE 341 Apt Elev 342


RNP APCH - GPS.

T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C or above 54°C. Baro-VNAV and VDP NA when using CIR altimeter setting. Rwy 28 helicopter visibility reduction below ¾ SM NA. Inop table does not apply to LNAV/VNAV all Cats and LNAV Cats A and B. For inop ALS, increase LPV Cat A and B visibility to 1⅛ SM. When local altimeter setting not received, use CIR altimeter setting and increase LPV DA to 771 feet and all visibilities ⅛ SM. Increase LNAV/VNAV DA to 896 feet; increase all MDAs 60 feet and LNAV and Circling visibility Cat C/D ¼ SM.


ODALS

MISSED APPROACH: Climb to 3000 direct IYIGO and hold, continue climb-in-hold to 3000.


ASOS	MEMPHIS CENTER	CAPE GIRARDEAU TOWER★	GND CON	UNICOM
120.55	133.65 292.15	125.525 (CTAF) L	124.7	122.95

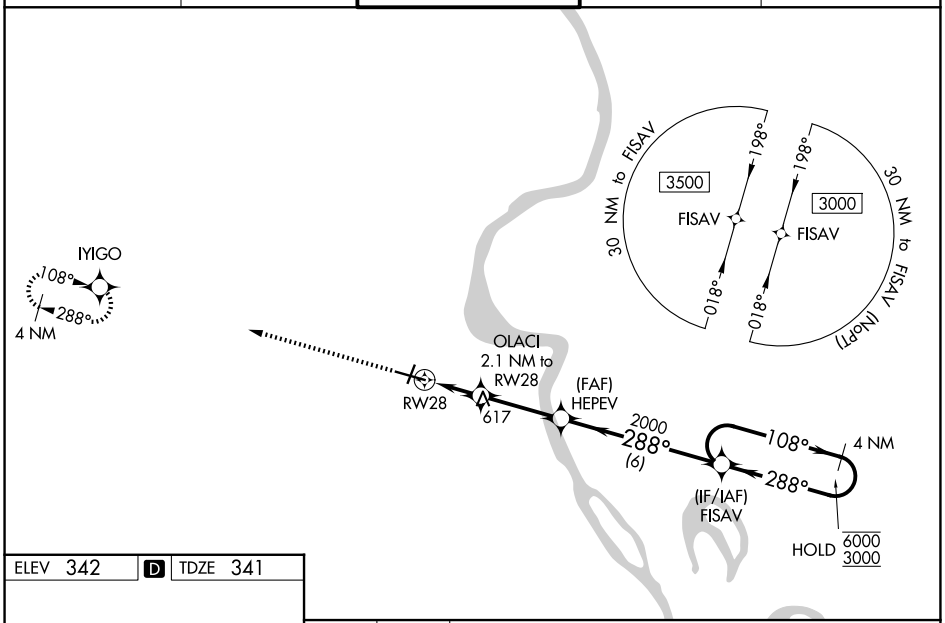

ELEV 342 D TDZ 341



MIRL Rwy 2-20 L
HIRL Rwy 10-28 L

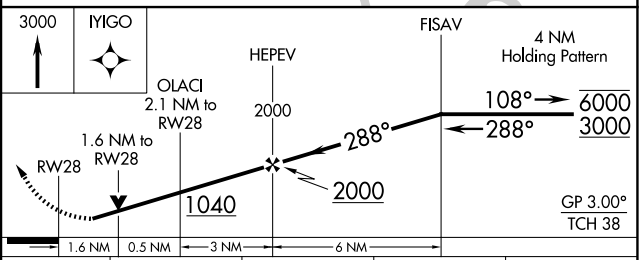

CATEGORY	A	B	C	D
LPV DA	723-1 382 (400-1)			
LNAV/VNAV DA	848-1⅜ 507 (600-1⅜)			
LNAV MDA	880-1 539 (600-1)		880-1⅜ 539 (600-1⅜)	
CIRCLING	880-1 538 (600-1)	960-1 618 (700-1)	1000-1¾ 658 (700-1¾)	1080-2¼ 738 (800-2¼)

NC-3, 29 OCT 2026 to 26 NOV 2026
NC-3, 29 OCT 2026 to 26 NOV 2026