RNAV (GPS) RWY 13

THE EASTERN IOWA (CID)


WAAS CH 86201 W13A	APP CRS 134°	Rwy Ldg 6200 / TDZE 869 / Apt Elev 869


RNP APCH - GPS.


When local altimeter setting not received, use IOW altimeter setting: increase LPV DA to 1189 feet; increase LNAV/VNAV DA to 1269 feet; increase all MDAs 80 feet and LNAV visibility Cat C ¼ SM and LNAV visibility Cat D ⅛ SM. Baro-VNAV and VDP NA when using IOW altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.

MISSED APPROACH: Climb to 3000 direct MORSE and hold.

ATIS	CEDAR RAPIDS APP CON ★	CEDAR RAPIDS TOWER ★	GND CON	UNICOM
124.15	119.7 266.8	118.7 (CTAF) L 266.8	121.6	122.95

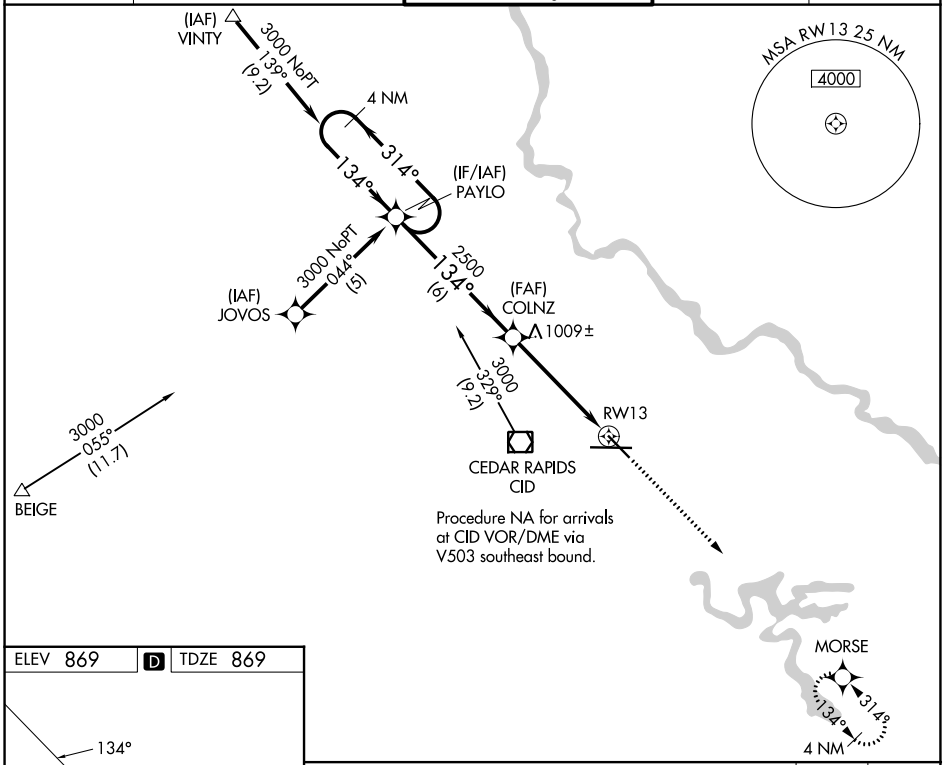

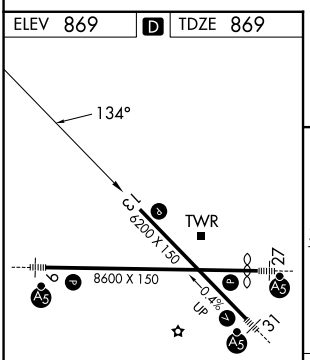

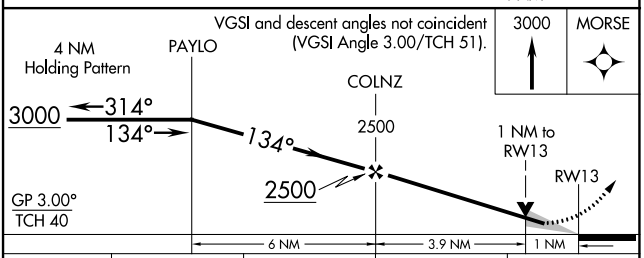

CATEGORY	A	B	C	D
LPV DA	1120-1 251 (300-1)			
LNAV/VNAV DA	1200-1¼ 331 (400-1¼)			
LNAV MDA	1260-1 391 (400-1)		1260-1⅛ 391 (400-1⅛)	1260-1¼ 391 (400-1¼)

MIRL Rwy 13-31 L
HIRL Rwy 9-27 L
REIL Rwy 13

NC-3, 29 OCT 2026 to 26 NOV 2026
NC-3, 29 OCT 2026 to 26 NOV 2026