JACKSONVILLE, FLORIDA

HI-ILS Z or LOC Z RWY 8

LOC I-JAX	APCH CRS	Rwy ldg 10,000 TDZE 30 Arpt Elev 30
110.7	077°	

[USAF]

JACKSONVILLE INTL (KJAX)

DME required. RADAR required for procedure entry.


▼ * When ALS inop, increase CAT E RVR to 40, vis to ¾ mile.

▲ ** When ALS inop, increase CAT E vis to 1⅜ miles.

ALSF-2


MISSED APPROACH: Climb to 1000 then climbing left turn to 4000 on heading 250° and on CRG R-316 to HAMOC/CRG 23 DME and hold, continue climb-in-hold to 4000.


ATIS	APP CON	TOWER	GND CON	CLNC DEL
125.85	119.0 269.9	118.3 317.7	121.9 348.6	119.5 290.275

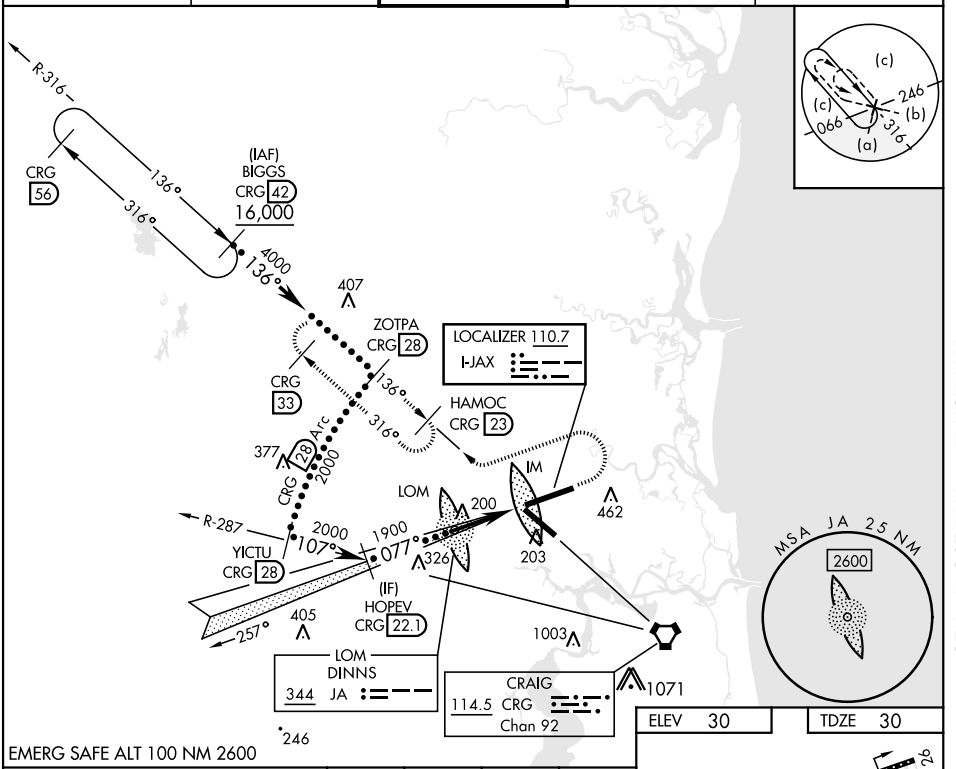

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 70).

1000	4000 hdg 250°	CRG R-316	HAMOC CRG 23

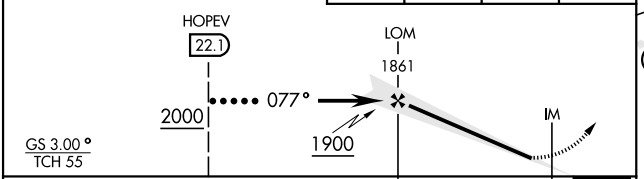



CATEGORY	C	D	E
S-ILS 8 *	230/18	200	(200-½)
S-LOC 8 **	480/45	450	(500-⅞)
C CIRCLING	580-1½ 550 (600-1½)	580-2 550 (600-2)	760-2½ 730 (800-2½)

FAF to MAP 5.6 NM

Knots	120	140	160	180	200
Min:Sec	2:48	2:24	2:06	1:52	1:41