JACKSONVILLE, FLORIDA

HI-ILS Z or LOC Z RWY 26

LOC I-PEK	APCH CRS	Rwy ldg 10,000 TDZE 27 Arpt Elev 30
110.3	257°	

[USAF] JACKSONVILLE INTL (KJAX)


DME required. RADAR required for procedure entry.

T * When ALS inop, increase CAT E RVR to 40, vis to ¾ mile.
** When ALS inop, increase vis to 1 ⅜ miles.
*** When ALS inop, increase RVR to 55, vis to 1 mile.


MALSR A5


MISSED APPROACH: Climb to 1200 then climbing right turn to 4000 on heading 360° and CRG R-316 to HAMOC 23 DME and hold, continue climb-in-hold to 4000.

ATIS	APP CON	TOWER	GND CON	CLNC DEL
125.85	119.0 269.9	118.3 317.7	121.9 348.6	119.5 290.275

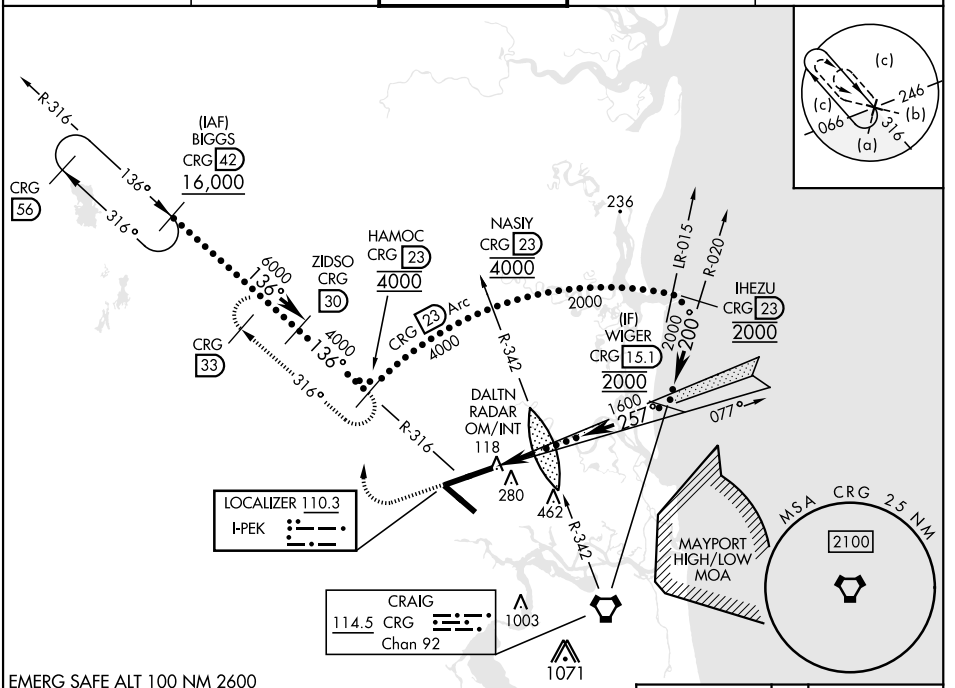

EMERG SAFE ALT 100 NM 2600

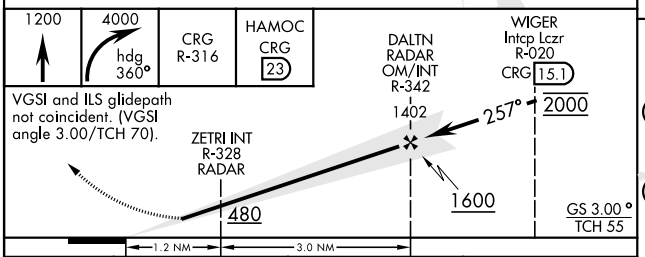



CATEGORY	C	D	E
S-ILS 26*	227/18 200 (200-½)		
S-LOC 26**	480/45 453 (500-⅞)		
C CIRCLING	580-1½ 550 (600-1½)	580-2 550 (600-2)	760-2½ 730 (800-2½)
ZETRI FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)			
S-LOC 26***	400/35 373 (400-⅝)		
C CIRCLING	580-1½ 550 (600-1½)	580-2 550 (600-2)	760-2½ 730 (800-2½)

REIL Rwy 32
HIRL Rwy 8-26, 14-32
TDZL/CL Rwy 8-26, 14

FAF to MAP 4.2 NM

Knots	120	140	160	180	200
Min:Sec	2:06	1:48	1:35	1:24	1:16

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026