WAAS	APP CRS	Rwy Ldg	7701
CH 70626	136°	TDZE	27
W14A		Apt Elev	30

RNAV (GPS) Z RWY 14

JACKSONVILLE INTL (JAX)


RNP APCH-GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C. For inop ALS, increase LPV visibility all Cats to ⅞ SM and increase LNAV/VNAV visibility all Cats and LNAV Cats A and B visibility to 1 SM. Rwy 14 helicopter visibility reduction below ¾ SM NA.


MALSR

MISSED APPROACH: Climb to 500 then climbing left turn to 2000 direct YEJWO and hold.

D-ATIS	JACKSONVILLE APP CON	JACKSONVILLE TOWER	GND CON
125.85	119.0 269.9	118.3 317.7	121.9 348.6

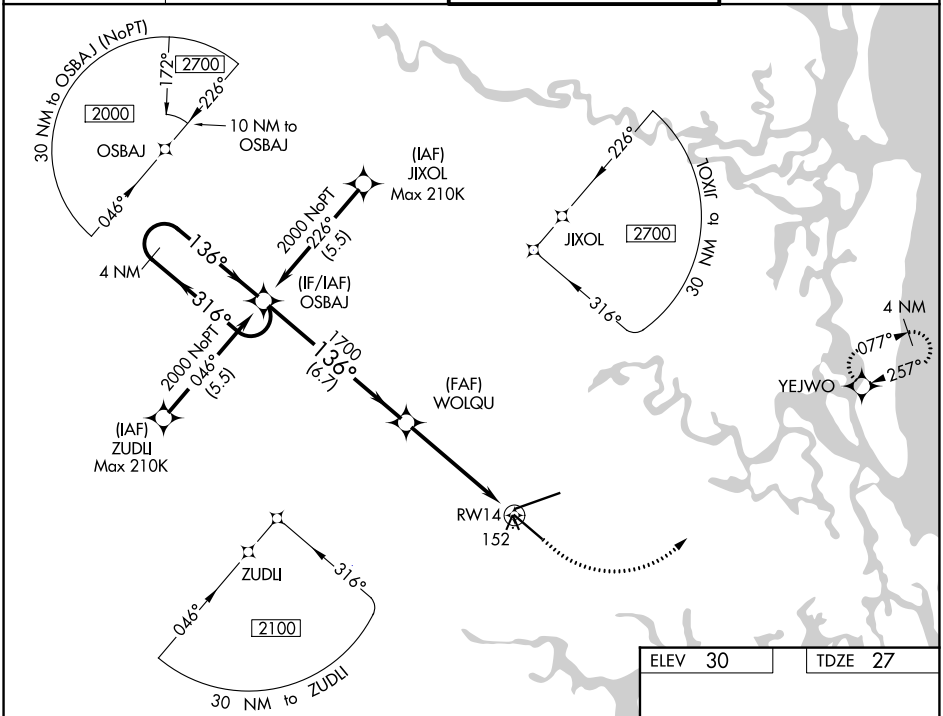

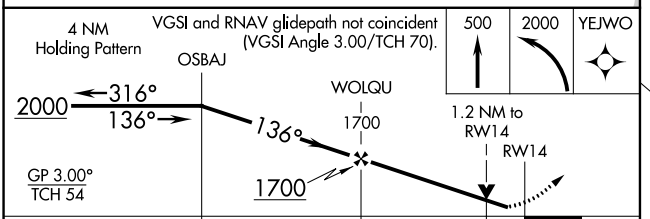



ELEV 30 TDZE 27

CATEGORY	A	B	C	D
LPV DA	306-¾ 279 (300-¾)			
LNAV/VNAV DA	388-¾ 361 (400-¾)			
LNAV MDA	480-¾ 453 (500-¾)		480-⅞ 453 (500-⅞)	
CIRCLING	520-1 490 (500-1)		580-1½ 550 (600-1½)	580-2 550 (600-2)

REIL Rwy 32
TDZL/RCLS Rwys 8, 14, and 26
HIRL Rwys 8-26 and 14-32

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026