WAAS	APP CRS	Rwy Ldg	10000
CH 97626	257°	TDZE	27
W26A		Apt Elev	30

RNAV (GPS) Z RWY 26

JACKSONVILLE INTL (JAX)


RNP APCH-GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C. For inoperative MALSR, increase LNAV/VNAV all Cats visibility to RVR 4500 and increase LNAV Cats C/D visibility to RVR 5500.


MALSR

MISSED APPROACH: Climb to 2000 direct UDAQI and hold.

D-ATIS	JACKSONVILLE APP CON	JACKSONVILLE TOWER	GND CON
125.85	119.0 269.9	118.3 317.7	121.9 348.6

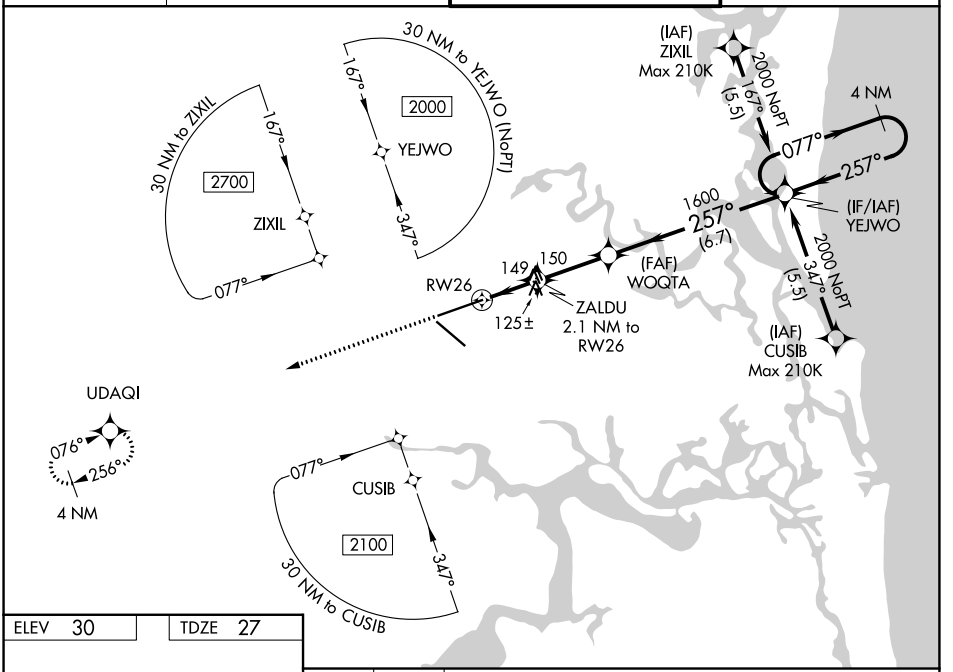


ELEV 30 TDZE 27



REIL Rwy 32
TDZL/RCLS Rwys 8, 14, and 26
HIRL Rwys 8-26 and 14-32

2000 UDAQI

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 70).

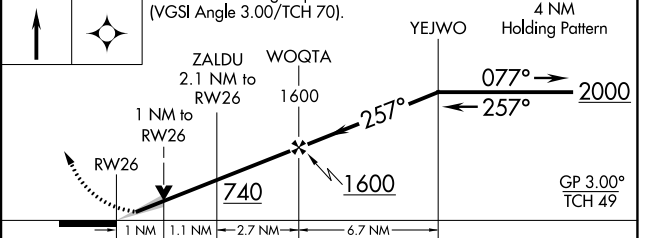

CATEGORY	A	B	C	D
LPV DA	227/18 200 (200-½)			
LNAV/VNAV DA	300/24 273 (300-½)			
LNAV MDA	400/24 373 (400-½)		400/35 373 (400-⅝)	
CIRCLING	520-1 490 (500-1)		580-1½ 550 (600-1½)	640-2 610 (700-2)

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026