WAAS	APP CRS	Rwy Ldg	6558
CH 90319	184°	TDZE	80
W18A		Apt Elev	90

RNAV (GPS) RWY 18


OCALA INTL-JIM TAYLOR FLD (OCF)

RNP APCH-GPS.


V A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C. When local altimeter setting not received, use GNV altimeter setting and increase LPV DA to 361 feet and all visibilities ⅛ SM; increase LNAV/VNAV DA to 595 feet and all visibilities ⅛ SM, increase all MDA's 100 feet and LNAV visibility Cats C and D ¼ SM and Circling visibility Cats C and D ½ SM. Baro-VNAV and VDP NA when using GNV altimeter setting.

MISSED APPROACH: Climb to 2000 direct TALZA and hold.


ATIS	JACKSONVILLE APP CON	OCALA TOWER ★	GND CON
128.125	118.6 251.15	119.25 (CTAF) L	121.4

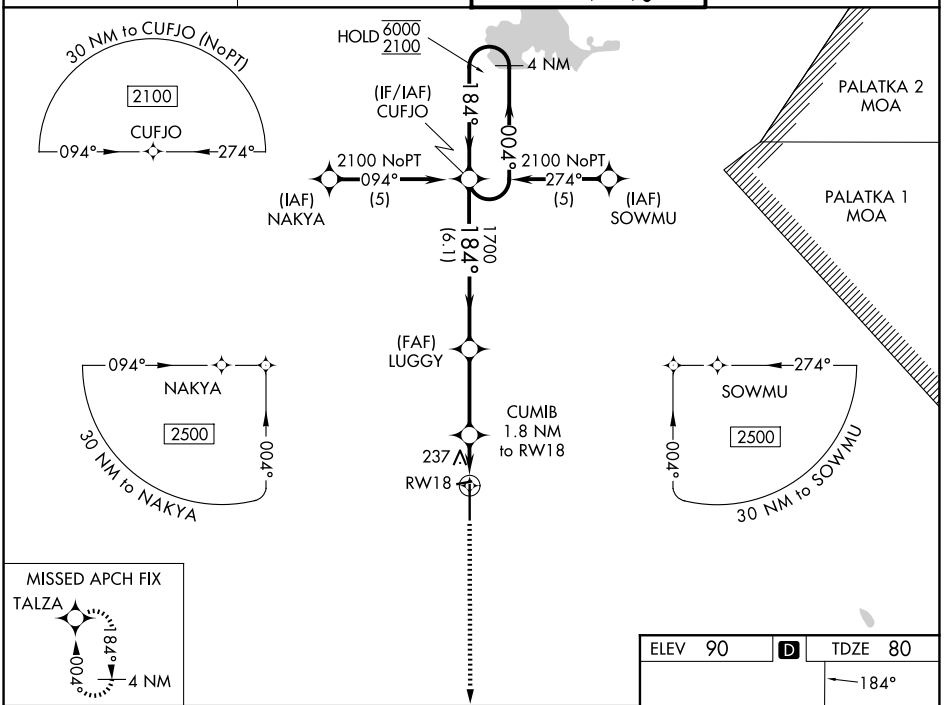

MISSED APCH FIX
TALZA
184°
004°
4 NM

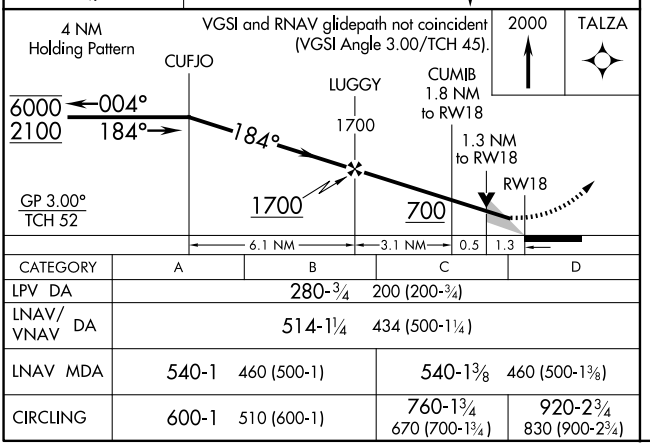

CATEGORY	A	B	C	D
LPV DA	280-¾	200 (200-¾)		
LNAV/VNAV DA	514-1¼	434 (500-1¼)		
LNAV MDA	540-1	460 (500-1)	540-1⅜	460 (500-1⅜)
CIRCLING	600-1	510 (600-1)	760-1¾ 670 (700-1¾)	920-2¾ 830 (900-2¾)

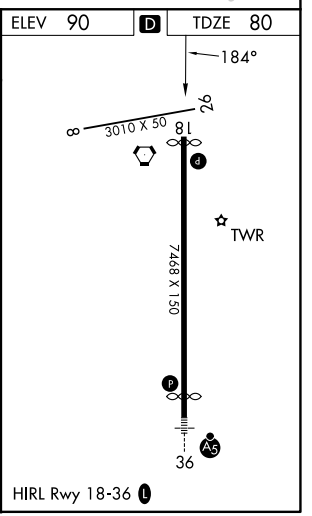

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026