RNAV (GPS) RWY 20

CAPE GIRARDEAU RGNL (CGI)


WAAS CH 42832 W20A	APP CRS 203°	Rwy Ldg 3997 TDZE 339 Apt Elev 342

RNP APCH-GPS.


T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C or above 54°C. Rwy 20 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using CIR altimeter setting. When local altimeter setting not received, use CIR altimeter setting and increase LPV DA to 637 feet. Increase LNAV/VNAV DA to 652 feet; increase all MDAs 60 feet and LNAV and Circling visibility Cat C/D ¼ SM.


MISSED APPROACH: Climb to 3000 direct ZUGUB and hold, continue climb-in-hold to 3000.

ASOS	MEMPHIS CENTER	CAPE GIRARDEAU TOWER ★	GND CON	UNICOM
120.55	133.65 292.15	125.525 (CTAF) L	124.7	122.95

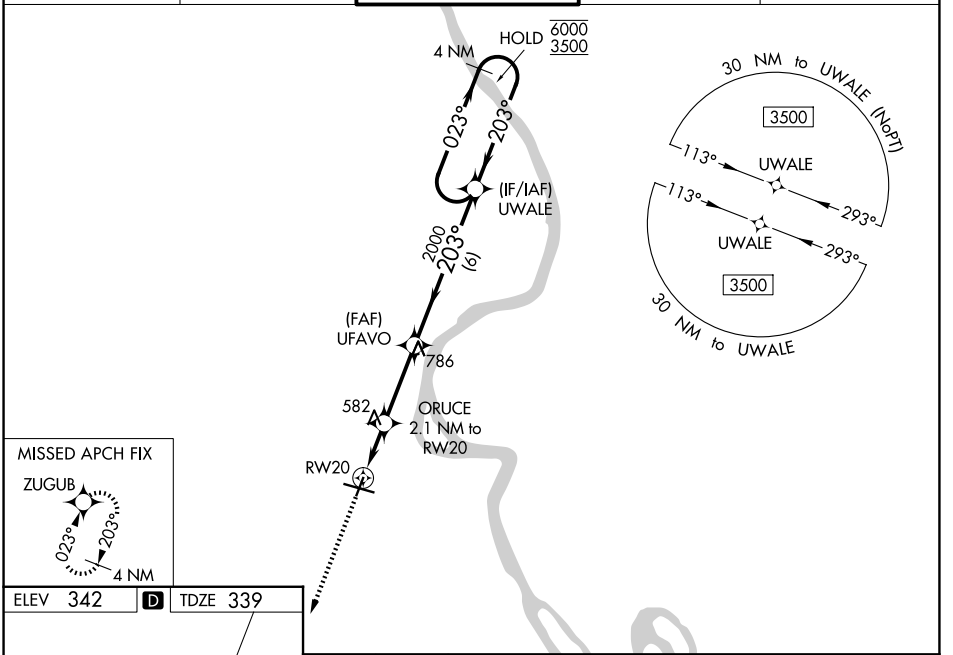

ELEV 342 D TDZE 339



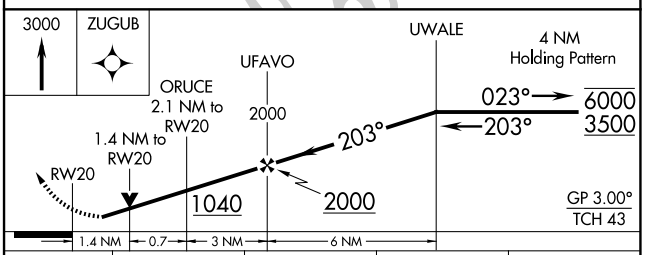

CATEGORY	A	B	C	D
LPV DA	589-1 250 (300-1)			
LNAV/VNAV DA	604-1 265 (300-1)			
LNAV MDA	840-1 501 (500-1)		840-1⅜ 501 (500-1⅜)	
CIRCLING	880-1 538 (600-1)	960-1 618 (700-1)	1000-1¾ 658 (700-1¾)	1080-2¼ 738 (800-2¼)

MIRL Rwy 2-20 L
HIRL Rwy 10-28 L

NC-3, 29 OCT 2026 to 26 NOV 2026
NC-3, 29 OCT 2026 to 26 NOV 2026