ILS or LOC RWY 3
CHADRON MUNI (CDR)

LOC I-CDR	APP CRS	Rwy Ldg	5211
110.9	028°	TDZE	3294
		Apt Elev	3298


ADF required.


When local altimeter setting not received, use IEN altimeter setting and increase S-ILS 3 DA to 3564 feet; increase all MDAs 80 feet and S-LOC 3 visibility Cat C/D ¼ SM and Circling visibility Cat B/C ½ SM. Inop table does not apply to S-ILS 3 all Cats, and S-LOC 3 Cats A and B.

MALSR

MISSED APPROACH: Climb to 5100 then climbing right turn to 6300 direct CD NDB and hold, continue climb-in-hold to 6300.


ASOS	DENVER CENTER	UNICOM
118.05	127.95 338.2	122.8 (CTAF) L

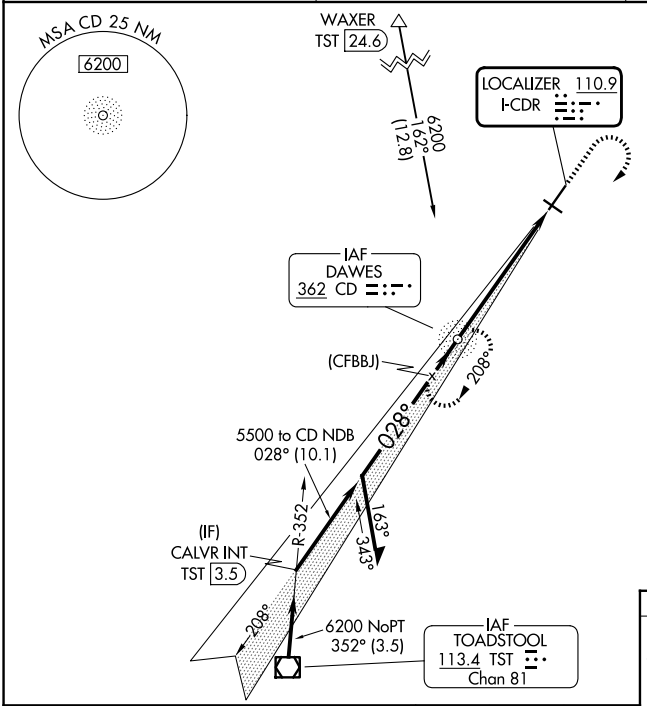

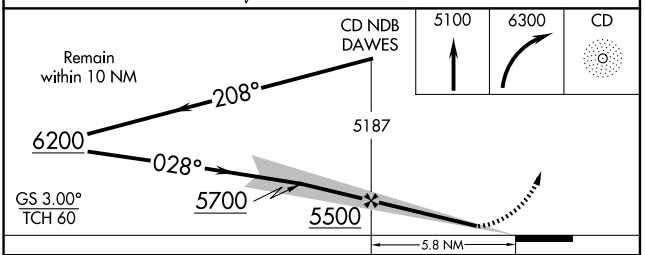

CATEGORY	A	B	C	D
S-ILS 3	3494-1 200 (200-1)			
S-LOC 3	3980-1 686 (700-1)		3980-1½ 686 (700-1½)	
CIRCLING	3980-1 682 (700-1)		3980-2 682 (700-1)	4220-3 922 (1000-3)

ELEV 3298 D TDZE 3294
REIL Rwys 21 and 30 L
MIRL Rwy 12-30 L
HIRL Rwy 3-21 L

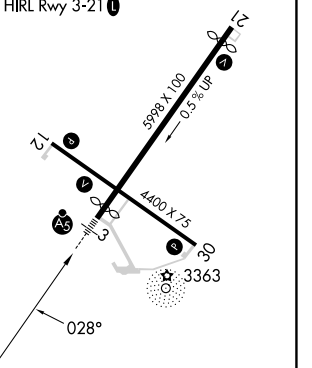

FAF to MAP 5.8 NM

Knots	60	90	120	150	180
Min:Sec	5:48	3:52	2:54	2:19	1:56

NC-2, 29 OCT 2026 to 26 NOV 2026
NC-2, 29 OCT 2026 to 26 NOV 2026