WAAS CH 56523 W12A	APP CRS 118°	Rwy Ldg 4400	TDZE 3294	Apt Elev 3298

RNAV (GPS) RWY 12


CHADRON MUNI (CDR)


T A

Baro-VNAV NA when using Pine Ridge altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Pine Ridge altimeter setting and increase all DA 70 feet and all MDA 80 feet; increase LPV all Cats visibility ⅛ mile, LNAV/VNAV all Cats visibility ¼ mile, and Circling Cat C visibility ¼ mile.


MISSED APPROACH: Climb to 5900 direct ECOPO and hold.

ASOS	DENVER CENTER	UNICOM
118.05	127.95 338.2	122.8 (CTAF) L

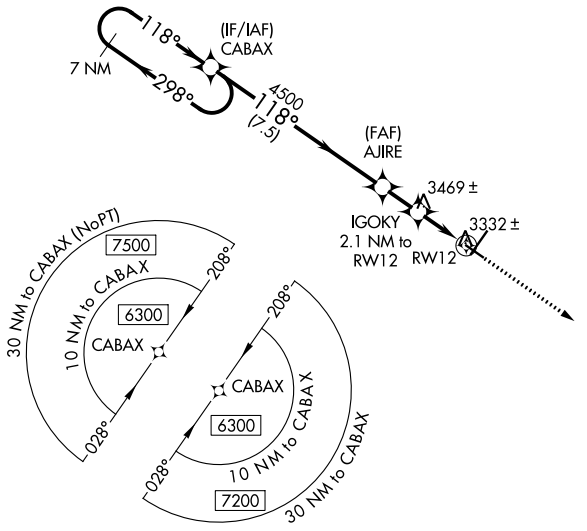

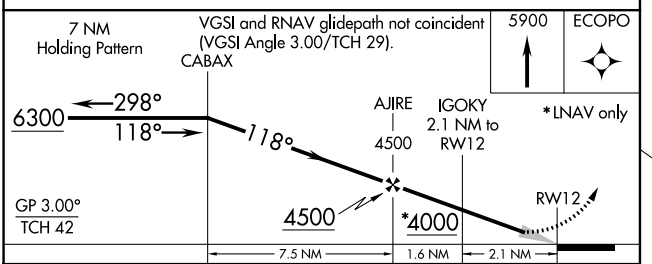

CATEGORY	A	B	C	D
LPV DA	3544-1 250 (300-1)			NA
LNAV/VNAV DA	3719-1½ 425 (500-1½)			NA
LNAV MDA	3720-1 426 (500-1)		3720-1¼ 426 (500-1¼)	NA
CIRCLING	3820-1 522 (600-1)	3920-1 622 (700-1)	3920-1¾ 622 (700-1¾)	NA

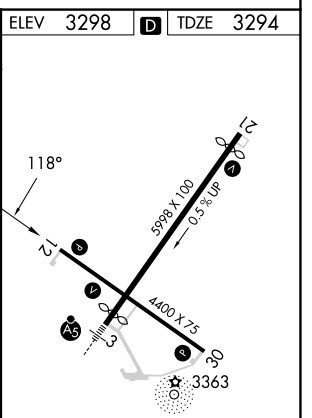

HIRL Rwy 3-21 L
MIRL Rwy 12-30 L
REIL Rwys 21 and 30 L

NC-2, 29 OCT 2026 to 26 NOV 2026
NC-2, 29 OCT 2026 to 26 NOV 2026