RNAV (GPS) RWY 30


CHADRON MUNI (CDR)

WAAS	APP CRS	Rwy Ldg	4400
CH 69523	298°	TDZE	3290
W30A		Apt Elev	3298


T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Pine Ridge altimeter setting and increase all DA 70 feet and all MDA 80 feet; increase LPV all Cats visibility ⅛ mile, LNAV/VNAV all Cats visibility ¼ mile, and LNAV and Circling Cat C visibility ¼ mile. Baro-VNAV and VDP NA with Pine Ridge altimeter setting.

MISSED APPROACH: Climb to 6300 direct CABAX and hold.


ASOS	DENVER CENTER	UNICOM
118.05	127.95 338.2	122.8 (CTAF) L

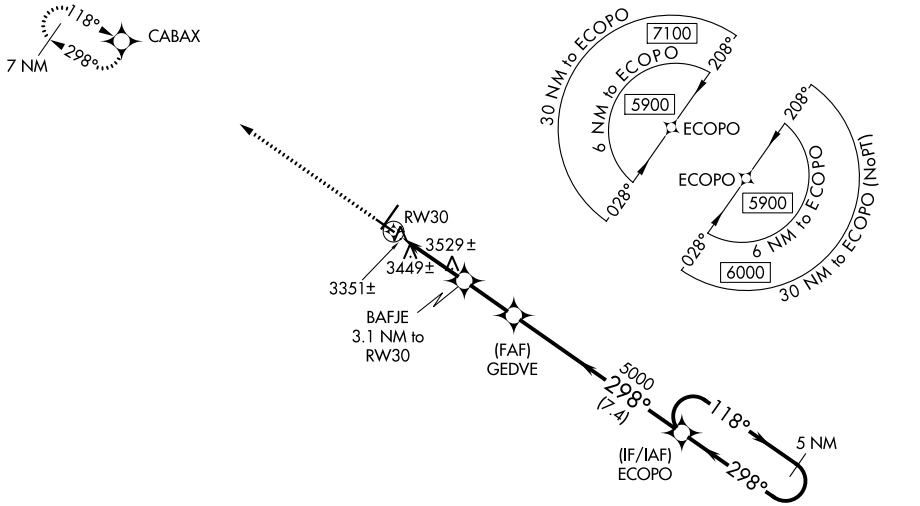

ELEV 3298 D TDZE 3290



HIRL Rwy 3-21 L
MIRL Rwy 12-30 L
REIL Rwys 21 and 30 L

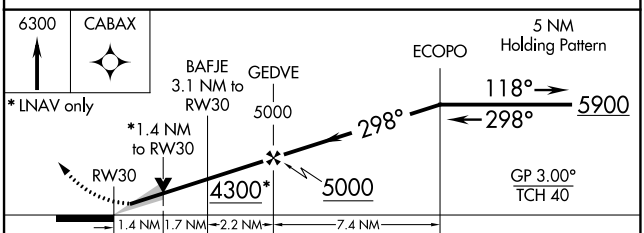

CATEGORY	A	B	C	D
LPV DA	3540-1 250 (300-1)			NA
LNAV/VNAV DA	3767-1⅝ 477 (500-1⅝)			NA
LNAV MDA	3780-1 490 (500-1)		3780-1⅜ 490 (500-1⅜)	NA
CIRCLING	3820-1 522 (600-1)	3920-1 622 (700-1)	3920-1¾ 622 (700-1¾)	NA

NC-2, 29 OCT 2026 to 26 NOV 2026
NC-2, 29 OCT 2026 to 26 NOV 2026