WAAS	APP CRS	Rwy Ldg	5000
CH 97605	073°	TDZE	891
W07A		Apt Elev	891


RNAV (GPS) RWY 7

OCONEE COUNTY RGNL (CEU)


Baro-VNAV NA when using Anderson altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Anderson altimeter setting and increase all DA 47 feet and all MDA 60 feet; increase LPV and LNAV/VNAV Cats A and B, and LNAV Cat C visibility ¼ mile. Helicopter visibility reduction below ¾ SM NA.


MISSED APPROACH: Climb to 3000 direct GUTQO and hold.

ASOS	GREER APP CON ★	UNICOM
119.275	118.8 270.275	122.7 (CTAF) L

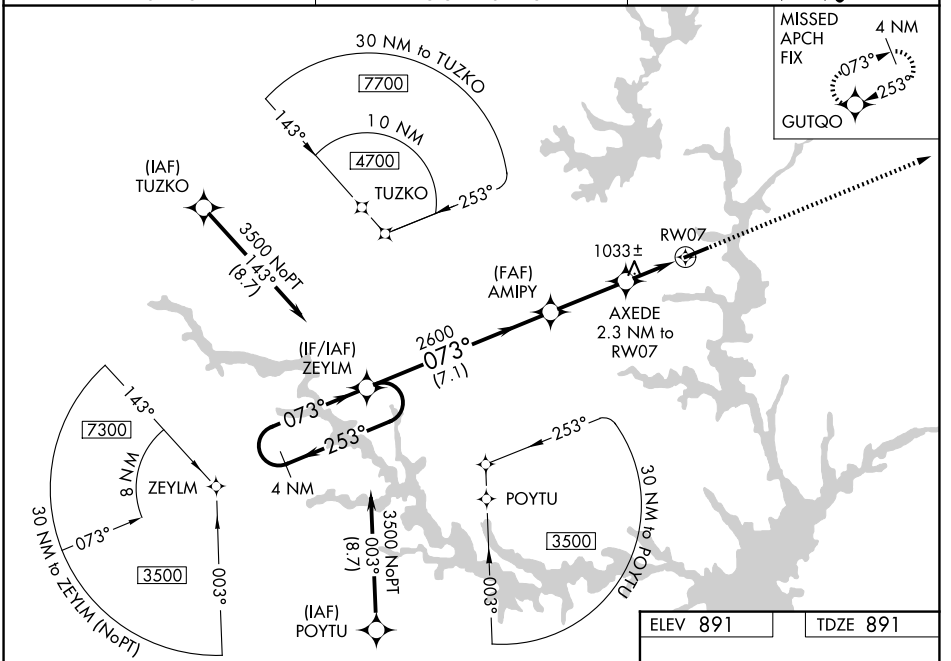

ELEV 891 TDZE 891

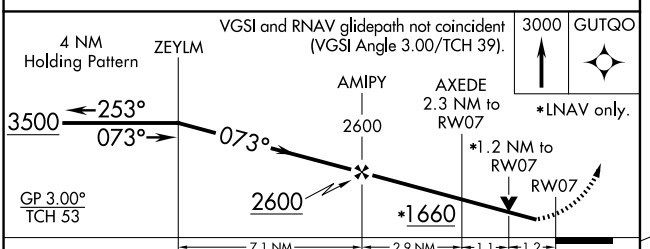



CATEGORY	A	B	C	D
LPV DA	1146-¾	255 (300-¾)	1146-1 255 (300-1)	NA
LNAV/VNAV DA	1144-¾	253 (300-¾)	1144-1 253 (300-1)	NA
LNAV MDA	1300-1	409 (500-1)	1300-1⅛ 409 (500-1⅛)	NA
CIRCLING	1300-1 409 (500-1)	1360-1 469 (500-1)	1640-2¼ 749 (800-2¼)	NA

MIRL Rwy 7-25 L
REIL Rwys 7 and 25 L

SE-2, 29 OCT 2026 to 26 NOV 2026
SE-2, 29 OCT 2026 to 26 NOV 2026