
WAAS CH 50405 W25A	APP CRS 253°	Rwy Ldg 5000 TDZE 891 Apt Elev 891

RNAV (GPS) RWY 25
OCONEE COUNTY RGNL (CEU)


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Anderson altimeter setting and increase all DA 47 feet and all MDA 60 feet; increase LPV all Cats, and LNAV Cat C visibility ⅛ mile; increase LNAV/VNAV all Cats visibility ¼ mile. Baro-VNAV and VDP NA when using Anderson altimeter setting.


MISSED APPROACH: Climb to 3000 direct ZEYLM and hold.

ASOS	GREER APP CON★	UNICOM
119.275	118.8 270.275	122.7 (CTAF)

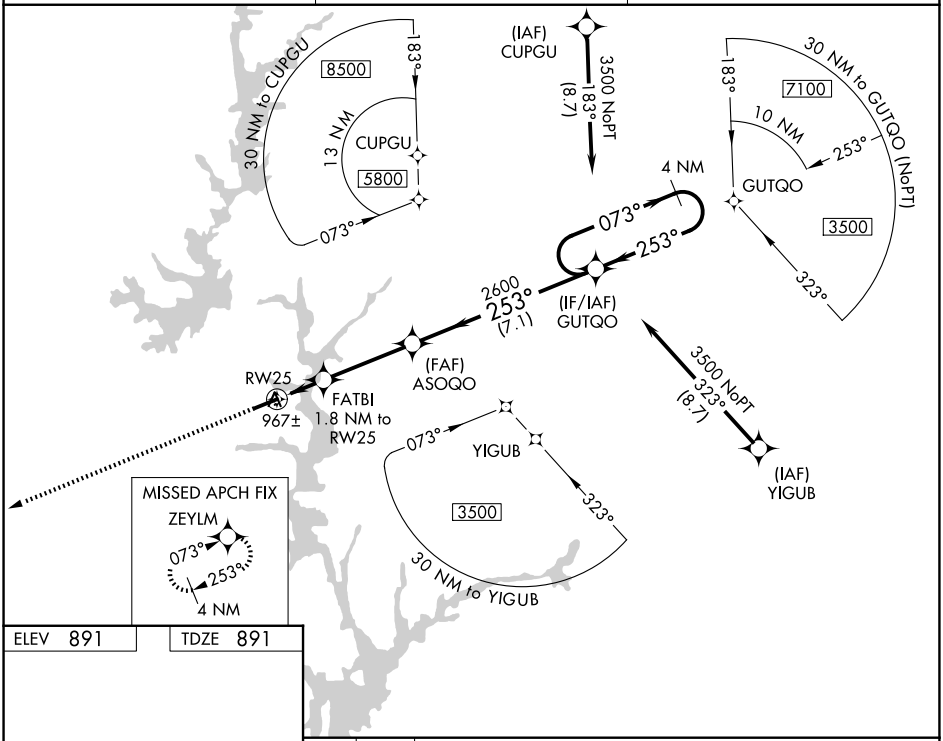

ELEV 891 TDZE 891



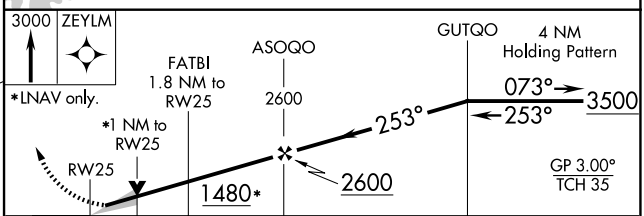

	A	B	C	D
LPV DA	1091-¾	200 (200-¾)		NA
LNAV/VNAV DA	1141-⅞	250 (300-⅞)		NA
LNAV MDA	1220-1	329 (400-1)		NA
CIRCLING	1300-1 409 (500-1)	1360-1 469 (500-1)	1640-2¼ 749 (800-2¼)	NA

MIRL Rwy 7-25
REIL Rwys 7 and 25

SE-2, 29 OCT 2026 to 26 NOV 2026
SE-2, 29 OCT 2026 to 26 NOV 2026