RNAV (GPS) RWY 25

THE FLORIDA KEYS MARATHON INTL (MTH)


WAAS CH 58312 W25A	APP CRS 251°	Rwy Ldg 5008 / TDZE 7 / Apt Elev 7

RNP APCH - GPS.


T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 12°C or above 54°C. Baro-VNAV NA when using EYW altimeter setting. Procedure NA at night. Rwy 25 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use EYW altimeter setting: increase LPV DA to 408 feet and all visibilities ⅛ SM, LNAV/VNAV DA to 497 feet and all visibilities ¼ SM, increase all MDAs 100 feet and LNAV Cat C/D visibility ¼ SM and Circling Cat C/D visibility ½ SM.


MISSED APPROACH: Climb to 2800 direct JANKA and hold.

ASOS	MIAMI CENTER	UNICOM
135.525	133.5 306.9	122.975 (CTAF) L

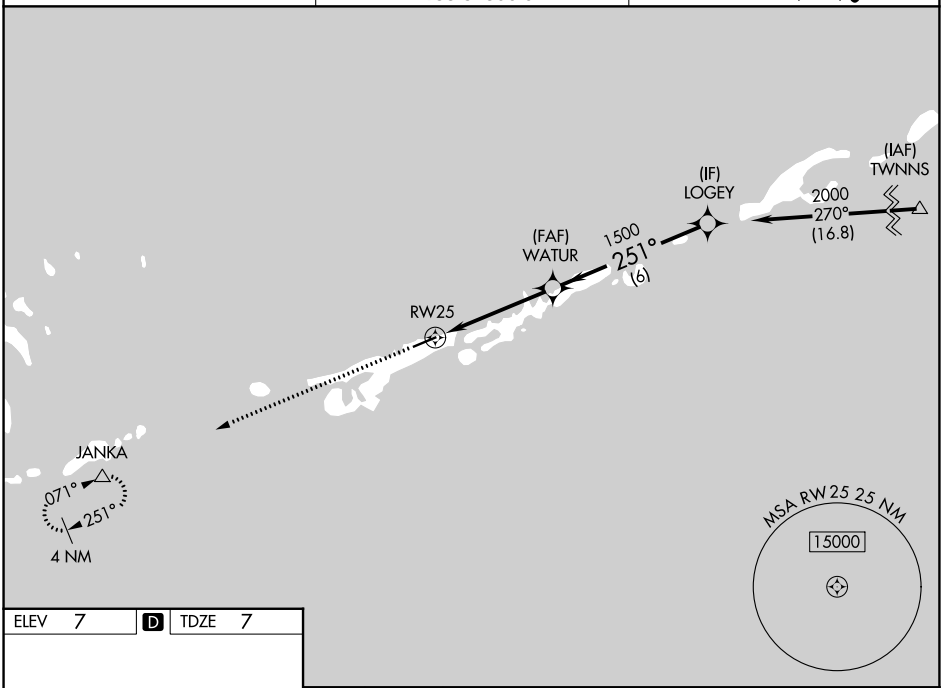

ELEV 7 D TDZE 7



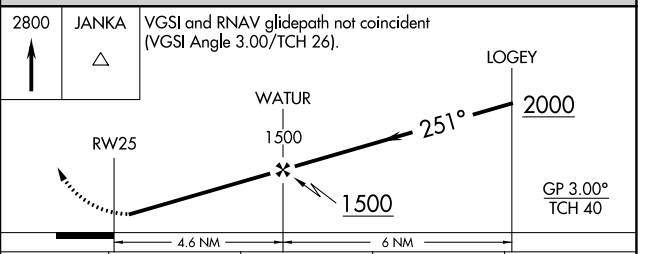

CATEGORY	A	B	C	D
LPV DA	315-1 308 (400-1)			
LNAV/VNAV DA	404-1⅛ 397 (400-1⅛)			
LNAV MDA	460-1 453 (500-1)		460-1⅜ 453 (500-1⅜)	
CIRCLING	460-1 453 (500-1)	480-1 473 (500-1)	620-1¾ 613 (700-1¾)	660-2 653 (700-2)

REIL Rwy 7 L
MIRL Rwy 7-25 L

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026